




# S1000.EHO

**Concealed electro-magnetic hold open cam action door closer**  
EN 2-4 power adjustable by spring

## Performance

- EN 2-4 adjustable power (1100mm maximum door width).
- CE marked (DOP-SHL-DC65).
- Certifire approved up to FD60 on timber doors.  CF5293
- Tested to BS EN 1154 - 

3	8	4	2	1	1	3
---	---	---	---	---	---	---
- Tested to BS EN 1155 - 

3	8	4	3	1	1	3
---	---	---	---	---	---	---

## Specifications

- Efficient cam action mechanism provides easy operation.
- 31mm wide slide track complete with matching arm and integrated 24v DC electro-magnetic hold open device with adjustable holding force from 25Nm to 78Nm.
- Adjustable hold open point from 80° to 120°.
- Requires 24vDC± 15% (0.058A / 1.4W) power supply from transformer and relay interface with Fire Alarm System.
- Adjustable closing power, speed and latch action.
- Minimum door thickness 44mm.

## Models


**S1000.EHO** - S1000 closer with electro-magnetic hold open arm track pack.

**S1000.EHO.ATP** - Electro-magnetic hold open arm and track pack only.

## Finishes

**SNP • SES • PCC • RAL • BRO**  
(Page 48-51 for further details).

## Dimensions

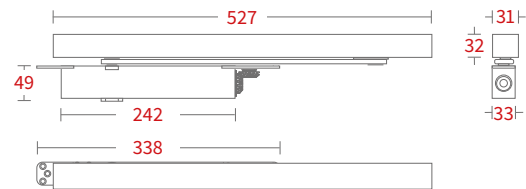

## Features

Concealed in door mounting.	✓
Closing power EN size.	2-4
Adjustable closing speed and latch action.	✓
Adjustable hold open point between 80° and 120°.	✓
Minimum door thickness.	44mm
Minimum door width to meet ADM/BS8300 at EN3.	777mm
Optional intumescent packs.	S1000.EHO.INT
Warranty (Mechanical / Electrical).	10 years / 2 years