



S1036

Concealed cam action door closer EN 3-6 power adjustable by spring

Performance

- EN 3-6 adjustable power (1400mm maximum door width).
- CE marked (DOP-SHL-DC63).
- Certifire approved up to FD60 on timber doors.
- Tested to BS EN 1154 - [386-3113](#)

Specifications

- Compact concealed body, track and arm providing the ultimate aesthetic solution.
- Efficient cam action mechanism provides easy operation.
- 31mm wide slide track complete with matching arm.
- Adjustable closing speed and independent latch action.
- Cushion stop with adjustment between 80° and 120° at installation.
- Suitable for door and transom mounted applications. (Transom mounting application falls outside of Certifire approval).
- Capable of meeting the opening force requirements of ADM and BS8300 (950mm minimum door width at EN3).

Models

S1036 - Suitable for both door and transom mounting.


S1036.EHO - As per S1036, but with electro magnetic hold open track. (Page 17 for further details).

Finishes

SNP • SES • PCC • RAL • BRO

(Page 48-51 for further details).

Dimensions

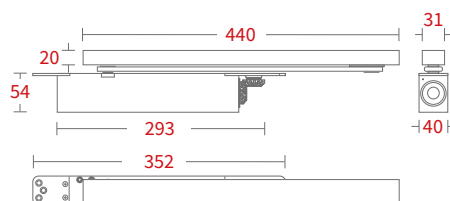

Features

Concealed in door mounting.	✓
Concealed in frame mounting.	✓
Closing power EN size.	3-6
Adjustable closing speed and latch action.	✓
Cushion stop / backcheck between 80° and 120°.	✓
Minimum recommended door thickness.	54mm
Minimum door width to meet ADM/BS8300 at EN3.	950mm
Optional mechanical hold open device (not for fire doors).	S1036.HOD
Optional intumescent packs.	S1036.INT
Warranty.	10 years



Power curve

