

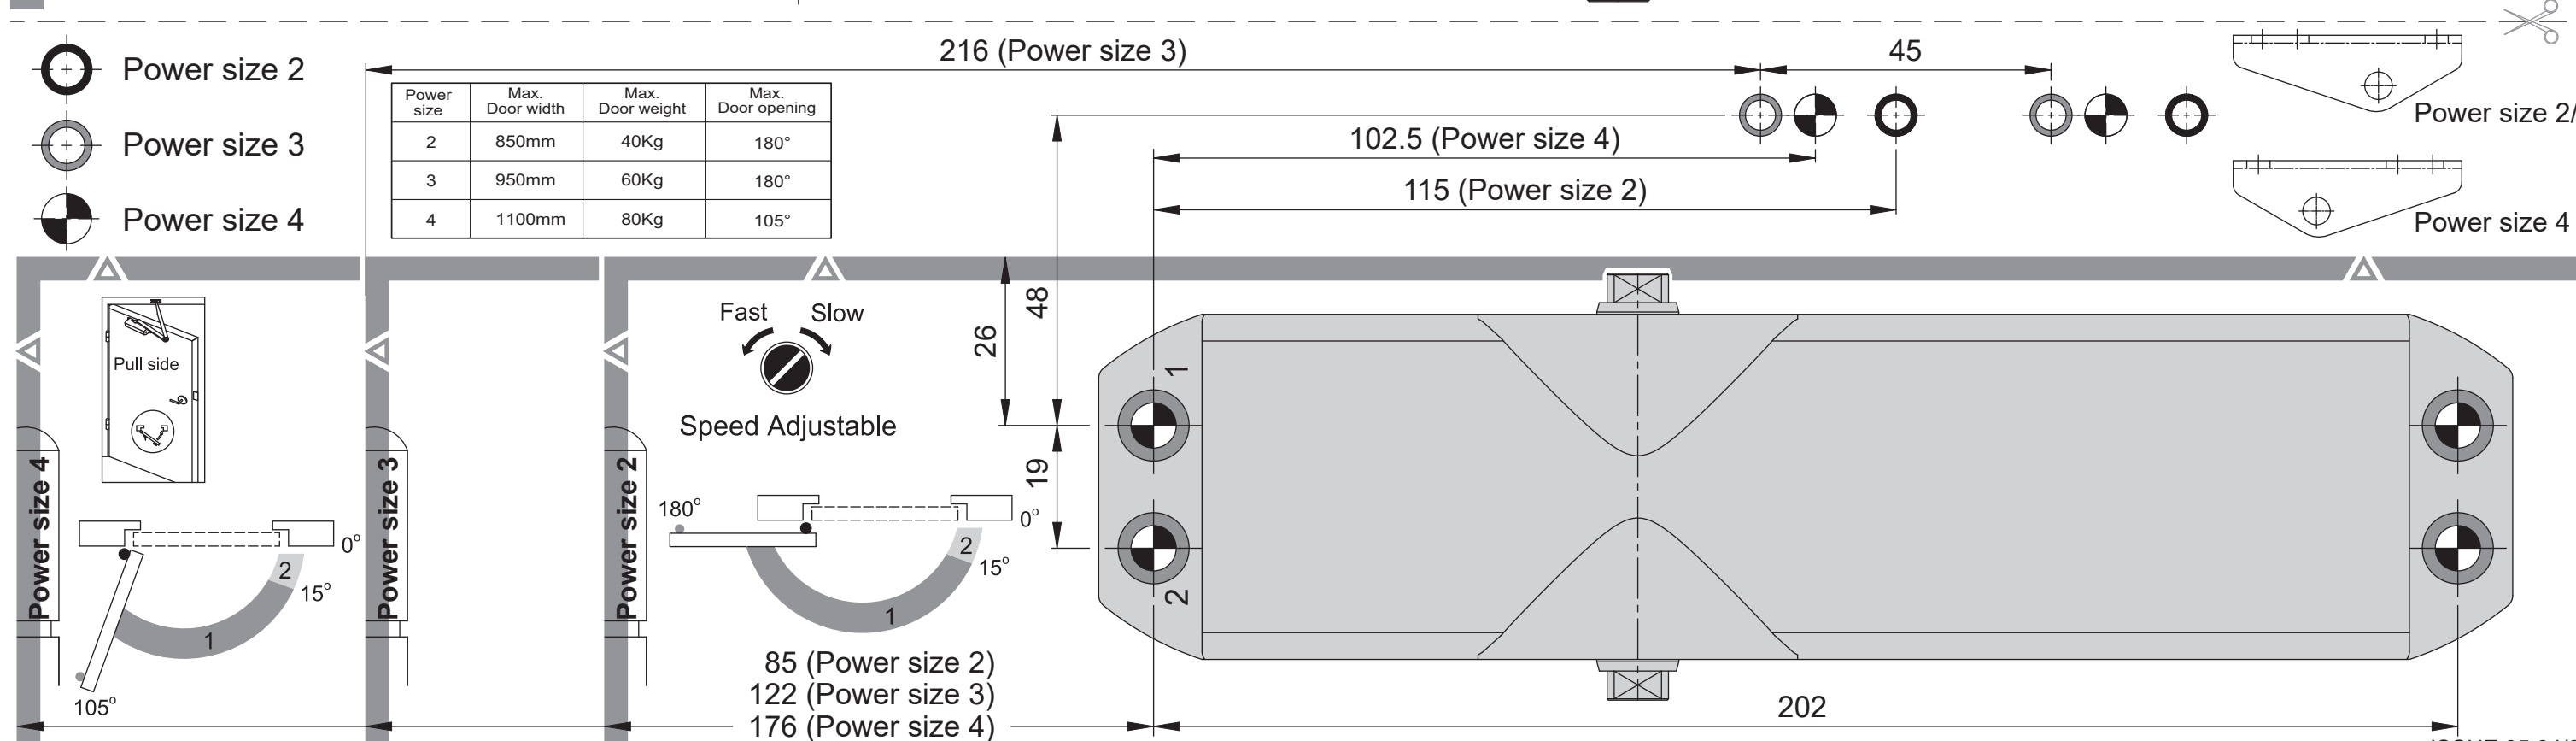


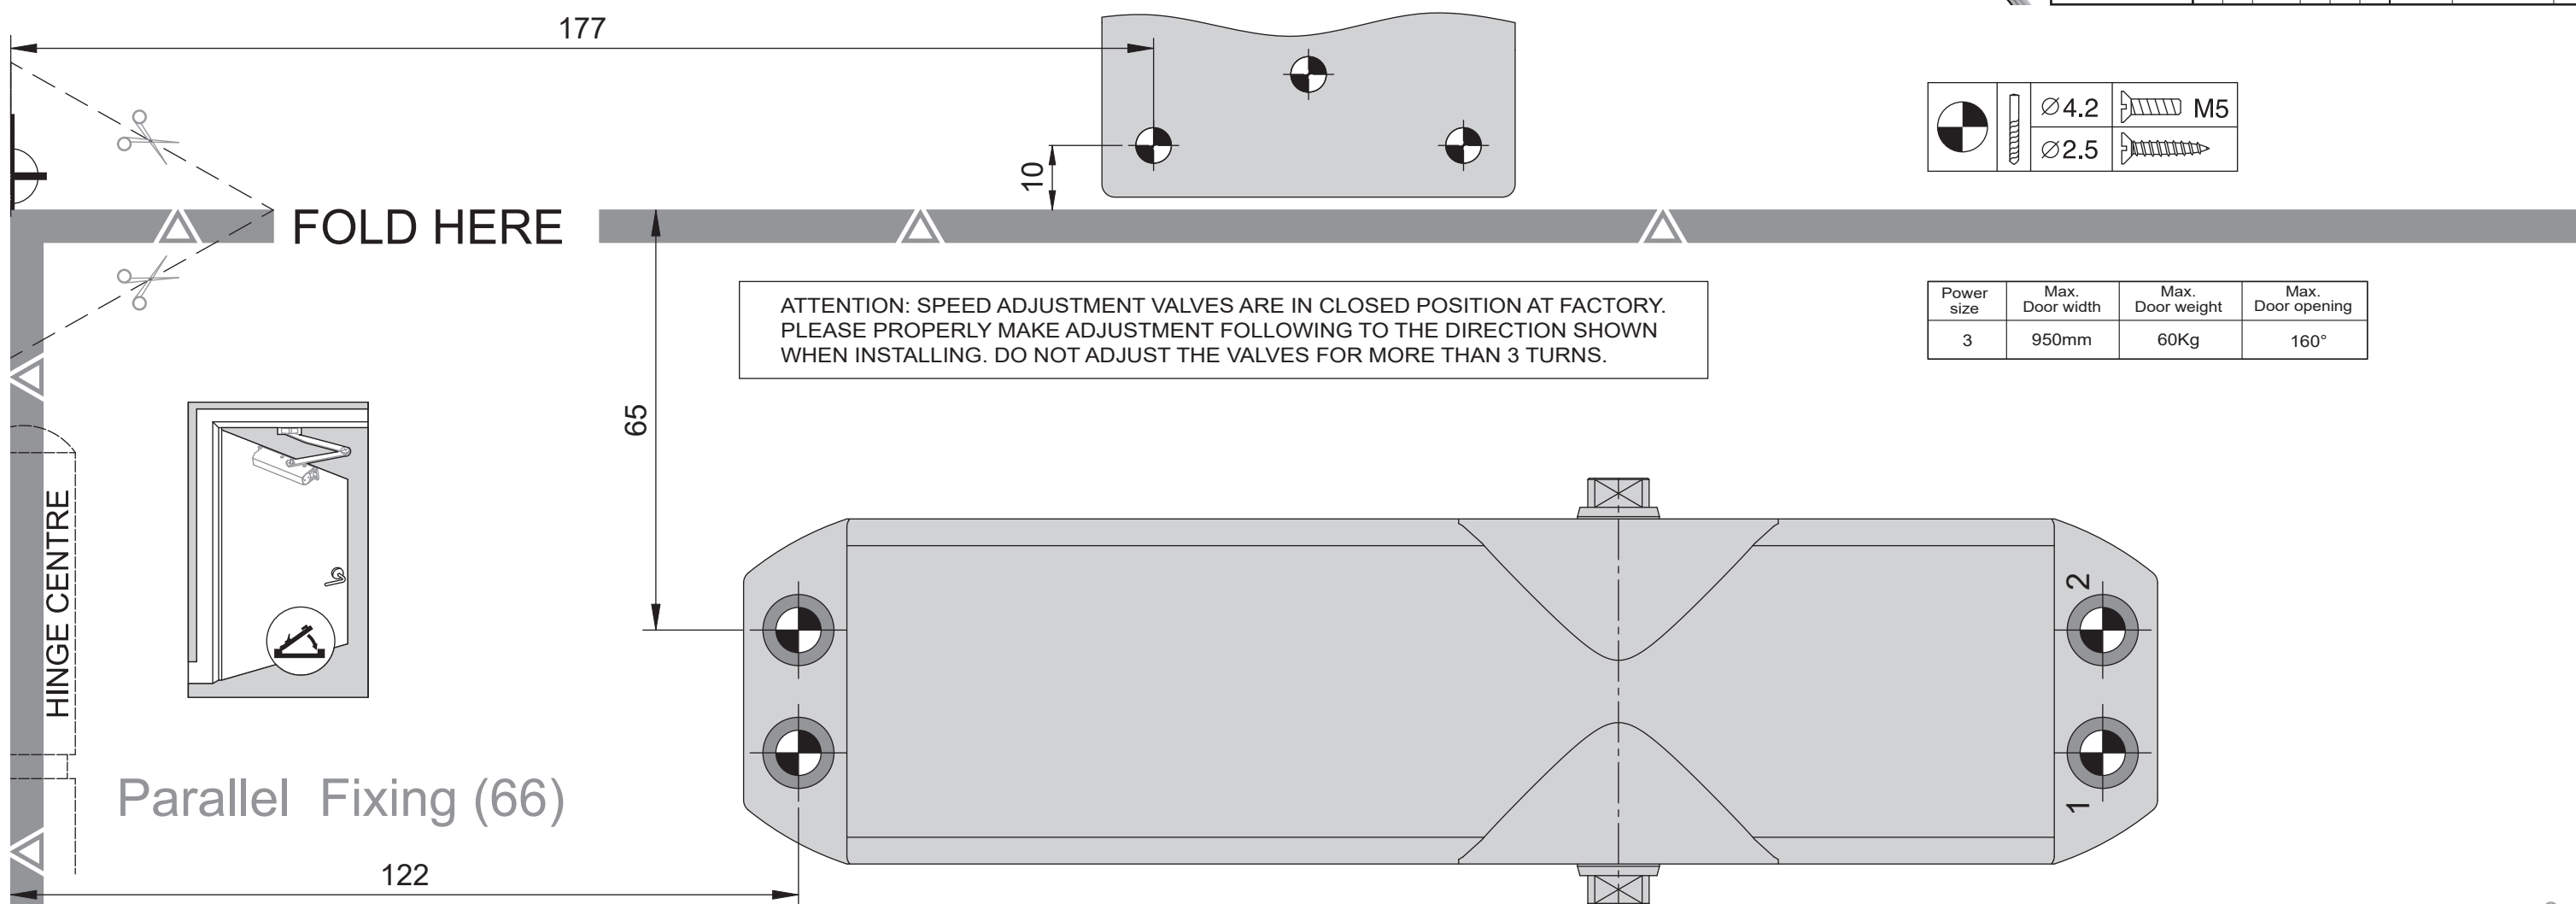

		Ø4.2		M5
		Ø2.5		

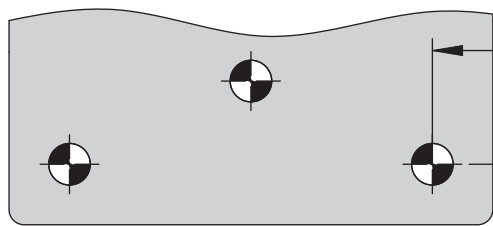


177


FOLD HERE

Power size	Max. Door width	Max. Door weight	Max. Door opening
3	950mm	60Kg	160°

ATTENTION: SPEED ADJUSTMENT VALVES ARE IN CLOSED POSITION AT FACTORY. PLEASE PROPERLY MAKE ADJUSTMENT FOLLOWING TO THE DIRECTION SHOWN WHEN INSTALLING. DO NOT ADJUST THE VALVES FOR MORE THAN 3 TURNS.

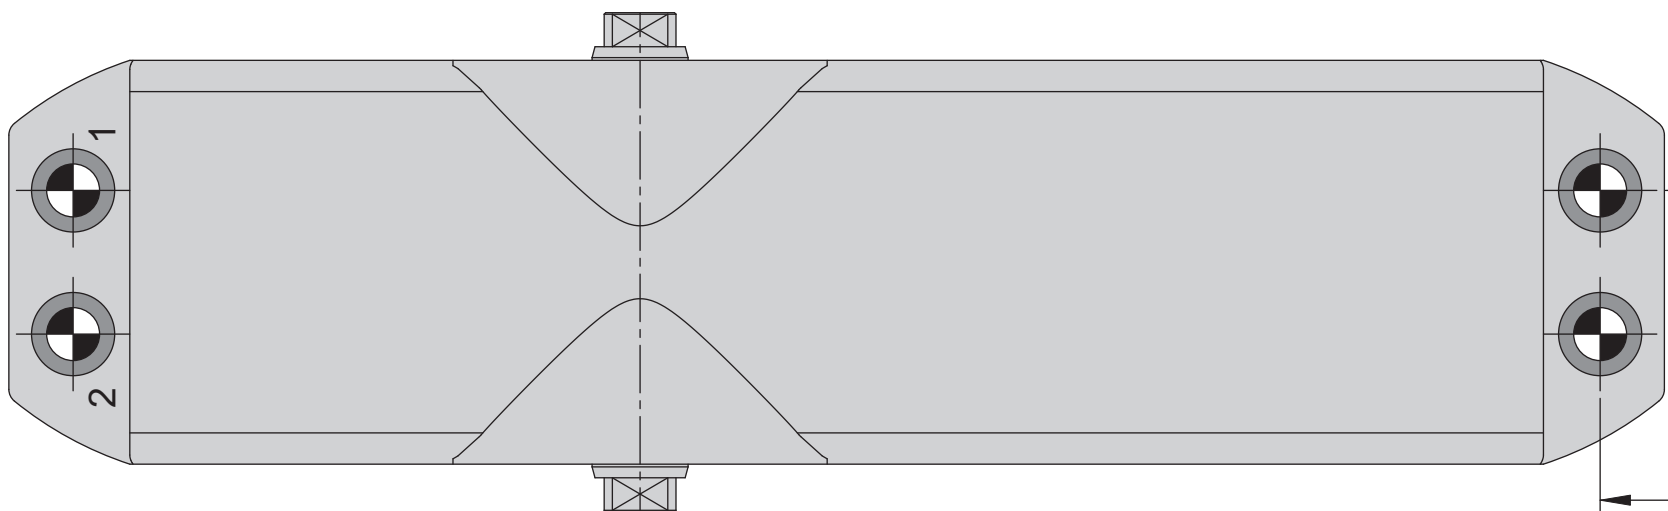


65

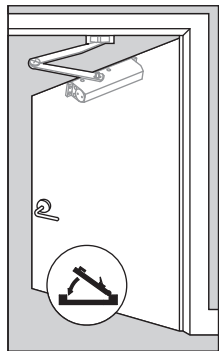

HINGE CENTRE

Parallel Fixing (66)

122

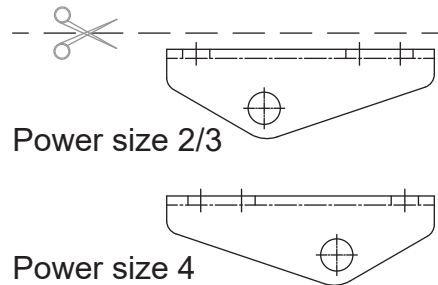

Power size 2/3

Power size 4

45

216 (Power size 3)

102.5 (Power size 4)


115 (Power size 2)

Power size	Max. Door width	Max. Door weight	Max. Door opening
2	850mm	40Kg	180°
3	950mm	60Kg	180°
4	1100mm	80Kg	105°


Power size 2

Power size 3

Power size 4

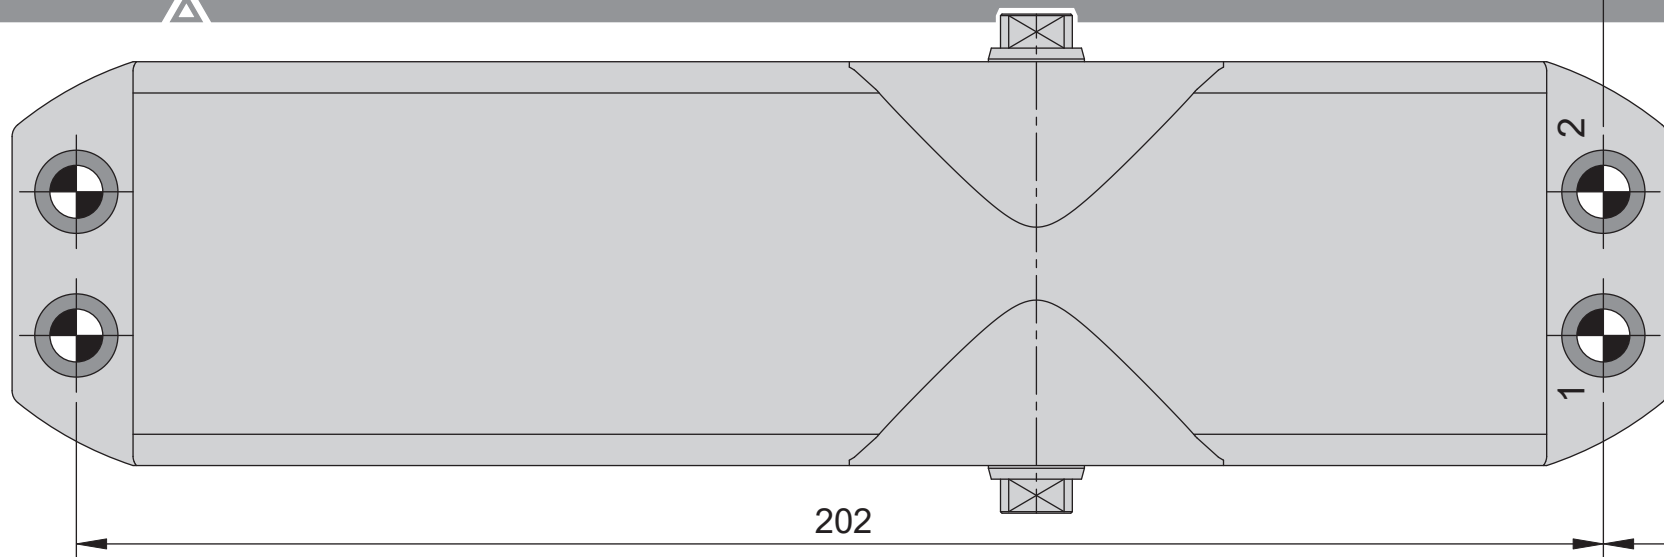


202

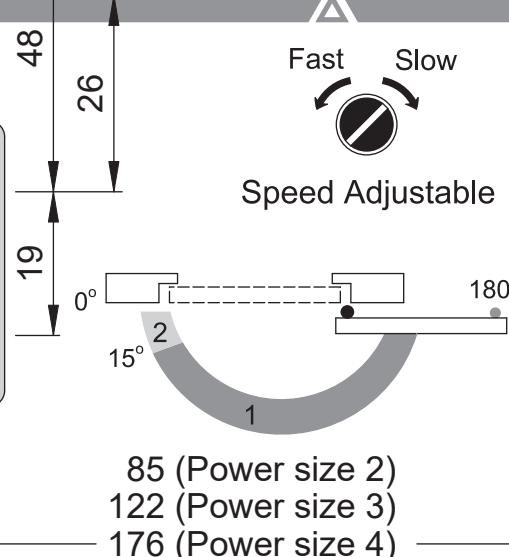

Fast Slow

Speed Adjustable


85 (Power size 2)
122 (Power size 3)
176 (Power size 4)

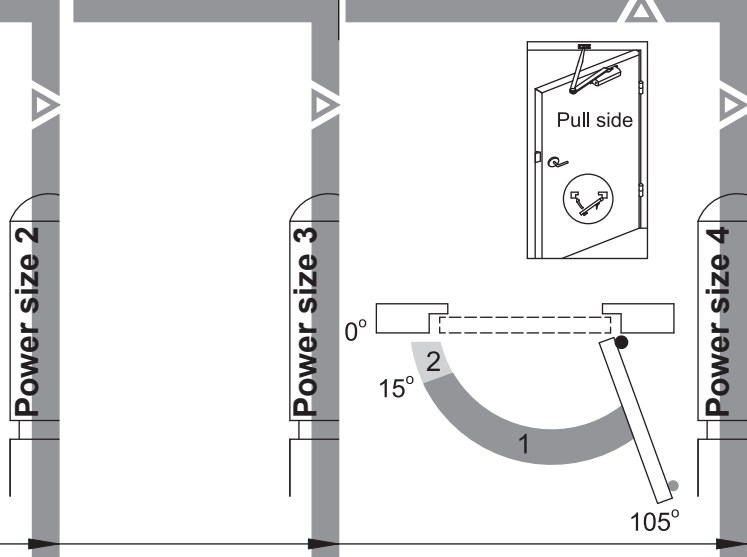

Power size 2

Power size 3

Power size 4



Pull side

105°